

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

#6
Official 3-12-03
RECEIVED
3-10-03
TL

Applicant: Shuo-Yen Robert Li

Case: 8

Serial No. 09/882,133

Confirmation No.: 9259

Filed: June 15, 2001

Group Art Unit: 2662

Examiner: Hassan Kizou

Title of Invention: **A CONDITIONALLY NONBLOCKING SWITCH OF THE
DECOMPRESSOR TYPE**

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Via Facsimile Number 703-872-9314
WASHINGTON, D.C. 20231

SIR:

Enclosed is a supplement to the Preliminary Amendment, received in the US Patent Office on September 11, 2001, in the above-identified application. This supplement is in Response to a Notice of Non-Compliant Amendment (37CFR 1.121) dated February 27, 2003. This Notice required a marked-up version of the replacement pages 8 and 9 included in the Preliminary Amendment -- marked-up pages 8 and 9 are enclosed, starting with page 12 and ending with page 15 to be considered as appended to the Preliminary Amendment.

Respectfully submitted,

John T. Peoples

Date: 3-10-03

John T. Peoples (Reg. No. 28,250)
14 Blue Jay Ct.
Warren, NJ 07059
(908) 580-9816

Certificate of Facsimile Transmission Under 37 CFR 1.8(a)

I hereby certify that this correspondence is being transmitted by me via facsimile transmission to the "Before Final" facsimile number 703-872-9314 for Technology Center 2600.

3-10-03
Date of Certificate

John T. Peoples
John T. Peoples

Pages 8 and 9 were changed as follows ([denotes the beginning and] denotes the end of removed words, and underline to text -- not the heading -- denotes the addition of words):

SUMMARY OF THE INVENTION

The shortcomings of the prior art, as well as other limitations and deficiencies, are obviated in accordance with the present invention by applying algebraic principles to the physical realization of a large switching fabric based upon contemporary technologies.

[In accordance with a broad system aspect of the present invention, an $N \times N$ decompressor for serving a connection request to route k incoming signals, $k \leq N$, and for enabling conditionally nonblocking switching, includes (a) a switch defined by a set of connection states and having an array of N input ports with N distinct input addresses and an array of N output ports with N distinct output addresses wherein the k incoming signals arrive at k distinct input ports determining k active input addresses and are destined for corresponding k distinct output ports determining k active output addresses; and (b) control circuitry, coupled to the switch, for routing the incoming signals from the k distinct input ports to the corresponding k distinct output ports by activating one of the connection states such that the activated one of the connection states accommodates the connection request subject to constraints on the connection request: (1) the k active input addresses are consecutive upon a rotation of the ordering of the N input addresses, and (2) the correspondence between the k active input addresses and the k active output addresses is order preserving after the rotation.

In accordance with a broad method aspect of the present invention, a method for constructing an $N \times N$ decompressor to serve a connection request to route k incoming signals, $k \leq N$, includes: (a) configuring a switch defined by a set of connection states and having an array of N input ports with N distinct input addresses and an array of N output ports with N distinct output addresses wherein the k incoming signals arrive at k distinct input ports determining k active input addresses and are destined for corresponding k distinct output ports determining k active output addresses; and (b) routing the incoming signals from the k distinct input ports to the corresponding k distinct output ports by activating one of the connection states such that the activated one of the connection states accommodates the connection request subject to constraints on the connection request: (1) the k active input addresses are consecutive upon a rotation of the ordering of the N input addresses, and (2) the correspondence between the k active input addresses and the k active output addresses is order preserving after the rotation.]

In accordance with a broad method aspect of the present invention, a method for implementing a class of $N \times N$ decompressors each serving a connection request to route m incoming signals, $m \leq N$, and for enabling the service of any connection request in a nonblocking way on the condition that the connection request is compliant to certain constraints, the method for each of the decompressors includes: (a) configuring a switch defined by a set of connection states and having an array of N input ports with N distinct input addresses and an array of N output ports with N distinct output addresses wherein the m incoming signals arrive at m distinct input ports determining m active input addresses and are destined for corresponding m distinct output ports determining m

active output addresses, and wherein said constraints on the connection request are that:
(1) the m active input addresses are consecutive upon a rotation of the ordering of the N
input addresses, and (2) the correspondence between the m active input addresses and the
 m active output addresses is order preserving after the rotation; and (b) routing the
incoming signals from the m distinct input ports to the corresponding m distinct output
ports by activating one of the connection states such that the activated one of the
connection states accommodates the connection request subject to said constraints on the
connection request, said class excluding (i) those having a switch constructed from the
banyan network of switching cells prepended with the shuffle exchange and (ii) those
having a switch constructed from the shuffle-exchange network of switching cells
prepended with the shuffle exchange.

In accordance with a broad system aspect of the present invention, a class
of $N \times N$ decompressors each serving a connection request to route m incoming signals,
 $m \leq N$, and for enabling the service of any connection request in a nonblocking way on the
condition that the connection request is compliant to certain constraints, each of the
decompressors includes: (a) a switch defined by a set of connection states and having an
array of N input ports with N distinct input addresses and an array of N output ports with
 N distinct output addresses wherein the m incoming signals arrive at m distinct input
ports determining m active input addresses and are destined for corresponding m distinct
output ports determining m active output addresses, and wherein said constraints on the
connection request are that: (1) the m active input addresses are consecutive upon a
rotation of the ordering of the N input addresses, and (2) the correspondence between the

m active input addresses and the m active output addresses is order preserving after the rotation; and (b) control circuitry, coupled to the switch, for routing the incoming signals from the m distinct input ports to the corresponding m distinct output ports by activating one of the connection states such that the activated one of the connection states accommodates the connection request subject to said constraints on the connection request, said class excluding (i) those having a switch constructed from the banyan network of switching cells prepended with the shuffle exchange and (ii) those having a switch constructed from the shuffle-exchange network of switching cells prepended with the shuffle exchange.

PTO/SB/97 (08-00)

Approved for use through 10/31/2002. OMB 0651-0031

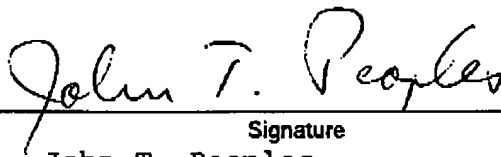
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Certificate of Transmission under 37 CFR 1.8

I hereby certify that this correspondence is being facsimile transmitted to the
United States Patent and Trademark Office

March 10, 2003

on _____
Date

Signature

John T. Peoples

Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of transmission, or this certificate must identify
each submitted paper.

Burden Hour Statement: This form is estimated to take 0.03 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.